



Sherborne **Sensors**

... the first choice in precision

LSOC / LSOP (L) Inclinometer

DC-Operated, Gravity-Referenced



Sensor design and manufacture from a world leader in load, acceleration and inclination

Sherborne Sensors is a specialist sensor and instrumentation manufacturer that provides solutions for test and measurement, industrial, manufacturing, R&D, aerospace and defence applications globally.

www.sherbornesensors.com



In North America: Email: nasales@sherbornesensors.com
Rest of World: Email: sales@sherbornesensors.com
Website: www.sherbornesensors.com

Sherborne Sensors, a Nova Matrix company **NOVA METRIX**

LSOC / LSOP (L) Servo Inclinometer

The LSO Series is a high precision gravity referenced servo inclinometer that can be used for a wide variety of industrial and military applications. Models are available in a variety of ranges with low impedance output signal. Electrical terminations are via 6 way connector (LSOC) or solder pins (LSOP).

Features

- Fully self-contained connect to a DC power source and a readout or control device for a complete operating system
- 4-20mA output
- $\pm 1^\circ$ to $\pm 90^\circ$ ranges available
- Extremely rugged, withstands 1500g shock

Applications

- Ballast transfer systems for offshore barges, ships and other marine applications
- Level control and calibration systems
- Pipeline levelling, setting tilt of grading machines, crane overturning moment alarms, and other heavy duty construction control requirements
- Large machinery installation and other electronic level applications

Specifications by Range @ 20°C					
Range		$\pm 3^\circ$	$\pm 14.5^\circ$	$\pm 30^\circ$	$\pm 90^\circ$
Excitation Voltage	Volts dc	± 20 to ± 30			
Current Consumption	mA (nom)	± 35			
Full Range Output (FRO) (see note 1)	Volts dc	± 16			
Output Standardisation	% FRO	± 1			
Output Load Resistance	Ω (max)	400			
Output Noise (DC to 10kHz)	V rms (max)	0.002			
Non-Linearity (see note 2)	% FRO (max)	0.08	0.02	0.02	0.05
Non-Repeatability	% FRO (max)	0.02	0.004	0.002	0.001
Resolution	arc seconds	0.4	1.0	2.0	4.0
3 dB Frequency	Hz	15	30	40	55
Sensitive Axis to Case Misalignment	deg (max)	± 0.15	± 0.25	± 0.5	± 1.0
Cross axis sensitivity (see note 3)	% FRO (max)	0.2			
Zero Offset (see note 4)	Volts dc (max)	± 0.1	± 0.07	± 0.07	± 0.07
Thermal Zero Shift	%FRO/ $^\circ\text{C}$ (max)	0.05	0.02	0.01	0.01
Thermal Sensitivity	%Reading/ $^\circ\text{C}$ (max)	0.05	0.05	0.02	0.01

“The LSO Series are Sherborne Sensors’ most popular Servo Inclinometers. Our global customers rely on the LSO Series accuracy and durability for their applications”



In North America: Email: nasales@sherbornesensors.com
 Rest of World: Email: sales@sherbornesensors.com
 Website: www.sherbornesensors.com

Sherborne Sensors, a Nova Metrix company

Environmental Characteristics		
Operating Temperature Range	°C	-18 to 70
Survival Temperature Range	°C	-40 to 70
Constant Acceleration Overload	g	50
		1500g, 0.5msec, ½ sine
Shock Survival		35g rms, 20 Hz to 2000 Hz
Vibration Endurance		sinusoidal
Environmental Sealing		IP65
EMC Directive	EN61326: 1998	
EMC Emissions	EN55022: 1998	30 MHz to 1 GHz
EMC Immunity	EN61000-4-2: 1995 inc A1: 1998 & A2: 2001	
	EN61000-4-3: 2002	
	EN61000-4-4: 2004	
	EN61000-4-6: 1996 inc A1: 2001	
	EN61000-4-6: 2007	
	EN61000-4-8: 1994 inc A1: 2001	

Notes

1. Full Range Output is defined as the full angular excursion from positive to negative, i.e. $\pm 90^\circ = 180^\circ$
2. Non-linearity is determined by the method of least squares.
3. Cross axis sensitivity is the output of the unit when tilted to full range angle in cross axis
4. Zero offset is specified under static conditions with no vibration inputs

How to Order:

Specify model type with appropriate range e.g.

LSOC-14.5L – fitted with connector $\pm 14.5^\circ$ range

LSOP-30L – fitted with solder pins $\pm 30^\circ$ range

Specify Optional Mating Electrical Connector 3CON-0009 with LSOC if required.

Electrical Connections:

Pin A – Supply 20-30Vdc

Pin B – 0V common


Pin C – 0V common

Pin D – Output 4-20mA

Pin E – Not used

Pin F – Self Test

Dimensions in (mm)

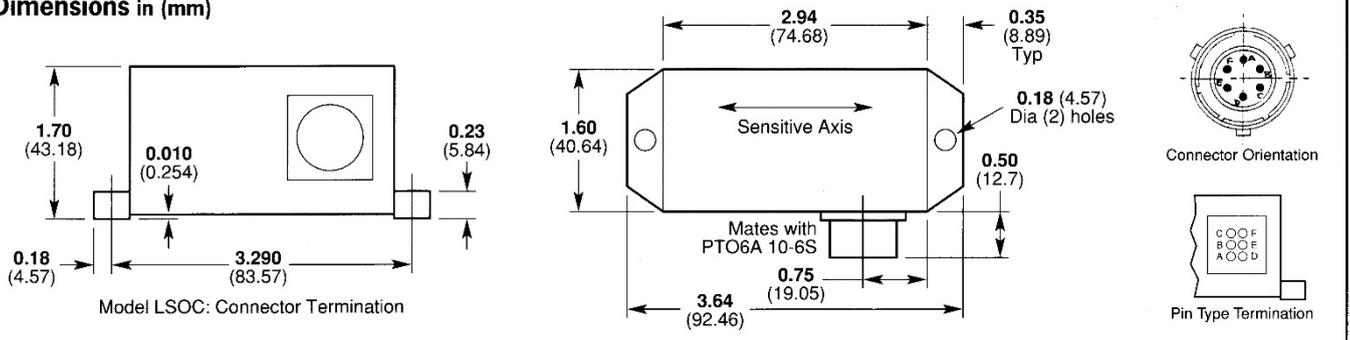

In North America: Email: nasales@sherbournesensors.com
 Rest of World: Email: sales@sherbournesensors.com
 Website: www.sherbournesensors.com

Sherborne Sensors, a Nova Metrix company



Accessories

Sherborne Sensors offers a broad range of accessories and services to enhance the performance and capabilities of our sensor products, including:

- line voltage and battery enabled power supplies
- specialized mating connectors
- cable assemblies
- high performance digital displays and universal input indicators
- repair and calibration services for all brands of accelerometers, inclinometers and load cells

Customisation

With extensive in-house engineering capabilities, Sherborne Sensors offers not only a large range of standard sensors but also unique expertise in the design, development and manufacture of specialized sensors and systems that meet specific customer application and performance requirements.

The need to customise our sensors to the specific requirements of an application to ensure they deliver improved safety and efficiency, with optimized cost and return-on-investment is often critical to project success.

Using customer driven elements of sensor design, output and performance, Sherborne Sensors will tailor a device to meet almost any application. Major cost and performance benefits may be realized by specifying a customized sensor where performance and mechanical design are optimally matched to specific application demands.

Contact Us

US

PO Box 1092
Lynnfield, MA
01940-9992

Tel : (877) 486 1766
Fax: (201) 847 1394

UK

1 Ringway Centre
Edison Road Basingstoke
Hampshire RG21 6YH

Tel: +44 (0)1256 630 300
Fax: +44 (0)870 444 0729

Email us: sales@sherbornesensors.com

Twitter: [@sherbornesensor](https://twitter.com/sherbornesensor)

LinkedIn: [sherbornesensors](https://www.linkedin.com/company/sherbornesensors)