



## SPECIFICATIONS

Item No.: SCA120T

Description: Voltage Type Dual Axis Inclinometer

### **Production implementation standard reference**

- Enterprise quality system standards: ISO9001: 2008 standard (certification number: 128101)
- Tilt sensor production standards: GB / T 191 SJ 20873-2003 inclinometer general specification of Level
- The Academy of metrology and quality inspection Calibrated in accordance to: JJF1119-2004 Electronic Level calibration Specification
- Gyro accelerometer test standard: QJ 2318-92 Gyro accelerometer test methods
- Software development reference standard: GJB 2786A-2009 military software development General requirements
- Product environmental testing standards: GJB150
- Electromagnetic anti-interference test standards: GB / T 17626
- Version: Ver.09
- Date:2014.4.22

# SCA120T- Voltage Type Dual Axis Inclinometer



## General Description

SCA120T is a dual axis inclinometer with analog voltage output, can simultaneously output the inclination of the two direction axes, the user simply collecting the inclinometer voltage value then can calculate the inclination of the current object. Built-in (MEMS) micro solid pendulum, by measuring the static gravity field changes, changes in mode output voltage (0-5V). Mainly used to measure the inclination of the object with respect to the horizontal plane.

This product uses non-contact measurement principle, can real-time output current posture inclination, Simple to use, and no need to retrieve the relative changed surface to install. Latest MEMS inclinometer productive technology production, high-precision, small size, strong resistance to external electromagnetic interference ability, the ability to withstand shock and vibration. It is the ideal choice for industrial equipment, platform measuring attitude!

## Features

- Dual-Axis Inclinometer
- Accuracy : refer to the technical data
- Output interface :0~5V
- IP67 protection class
- Resolution: 0.01°
- Measuring Range :  $\pm 1 \sim \pm 90^\circ$  optional
- Wide voltage input: 9~36V
- Wide temperature working:  $-40 \sim +85^\circ\text{C}$
- Highly anti-vibration performance >2000g
- Small Volume : 90×40×26mm (customized)


## Application:

- Engineering vehicles automatic leveling
- Aerial platform vehicle, lifter safety & protection
- Underground drill posture navigation
- Based on the angle direction measurement
- Equipment level control
- Directional satellite communications antenna pitching angle measurement
- Mining machinery, oil-well drilling equipment
- Bridge & dam detection
- Medical facilities angle control
- Shield pipe jacking application
- Geological equipment inclined monitoring
- Alignment control , curve control



# SCA120T- Voltage Type Dual Axis Inclinometer

## Ordering information:

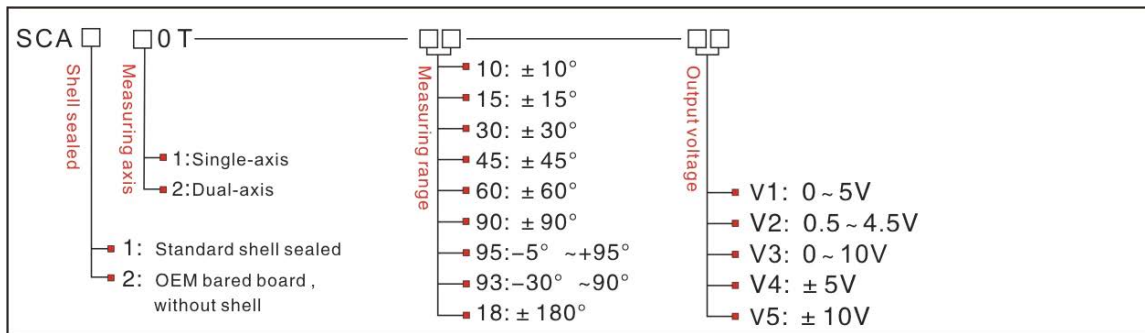

E.g: SCA120T-10-v1: dual/standard/±10°Measuring range/0V-5V output voltage

## Technical Data

Parameters	Conditions	SCA120T-10	SCA120T-30	SCA120T-60	SCA120T-90	Unit
Measuring range		±10	±30	±60	±90	°
Measuring axis		X-Y	X-Y	X-Y	X-Y	
Zero output	0° output	2.5	2.5	2.5	2.5	V
Resolution		0.01	0.01	0.01	0.01	°
Absolute accuracy		0.02	0.05	0.08	0.1	°
Long term stability		0.05	0.05	0.05	0.05	
Zero temperature coefficient	-40~85°	±0.006	±0.006	±0.006	±0.006	°/°C
Sensitivity temperature coefficient	-40~85°	≤100	≤100	≤100	≤100	ppm/°C
Power on time		0.5	0.5	0.5	0.5	S
Response time		0.05	0.05	0.05	0.05	s
Response frequency		1~20	1~20	1~20	1~20	Hz
Electromagnetic compatibility	According to EN61000 and GBT17626					
MTBF	≥50000hours/times					
Insulation Resistance	≥100M					
Shockproof	100g@11ms、3Times/Axis(half sinusoid))					
Anti-vibration	10grms、10~1000Hz					
Protection glass	IP67					
Cables	Standard 1M length、wearproof、grease proofing、wide temperature、Shielded cables4*0.4mm2					
Weight	110g(without cable)					

\*This Technical data only list ± 10 °, ± 30 °, ± 60 °, + 90 ° series for reference, other measuring range please refer to the adjacent parameters.

## Electronic Characteristics

Parameters	Conditions	Min	Standard	Max	Unit
Power supply	Standard	9	12、 24	36	V
	Optional		5		V
Working current			30		mA
Output overload	Resistive	10			kΩ
	Capacitive			20	nF
Working temperature		-40		+85	°C
Store temperature		-55		+125	°C

### Key Words:

**Resolution:** Refers to the sensor in measuring range to detect and identify the smallest changed value.


**Absolute accuracy:** Refers to in the normal temperature circumstances, the sensor absolute linearity, repeatability, hysteresis, zero deviation, and transverse error comprehensive error.

**Long term stability :** Refers to the sensors in normal temperature conditions, the deviation between the maximum and minimum values after a year's long time work.

**Response time:** Refers to the sensor in an angle change, the sensor output value reached the standard time required.


## Mechanical Parameters

- Connectors: 1m lead cable (customized)
- Protection glass: IP67
- Enclosure material : Aluminum Oxide
- Installation : 4\*M6 screws

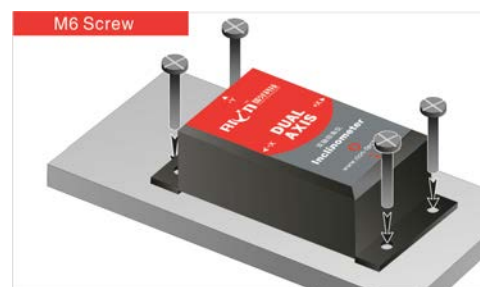

## Working Principle

Adopt the European import of core control unit, using the capacitive micro pendulum principle and the earth gravity principle, when the the inclination unit is tilted, the Earth's gravity on the corresponding pendulum will produce a component of gravity, corresponding to the electric capacity will change, , by enlarge the amount of electric capacity , filtering and after conversion then draw the inclination.

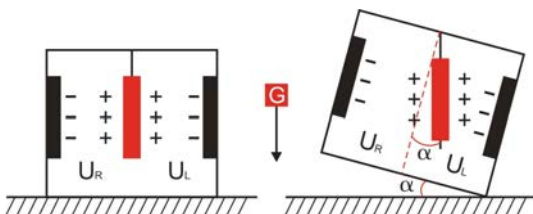


$U_R, U_L$  Respectively is the pendulum left plate and the right plate corresponding to their respective voltage between the electrodes, when the tilt sensor is tilted,  $U_R, U_L$  Will change according to certain rules, so  $f(U_R, U_L, )$  On the inclination of  $\alpha$  function:


$$\alpha = f(U_R, U_L)$$

## Typical performance diagram


1: Input and Output characteristics :

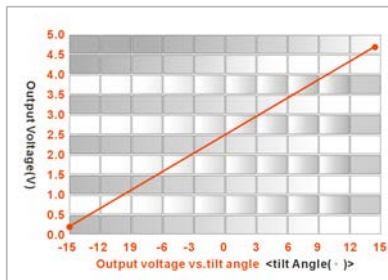

2: Temperature characteristic chart :

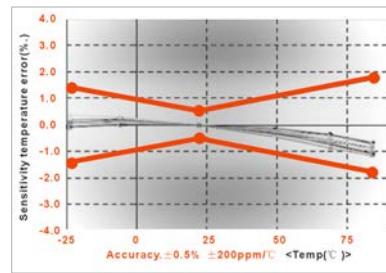


## Dimension

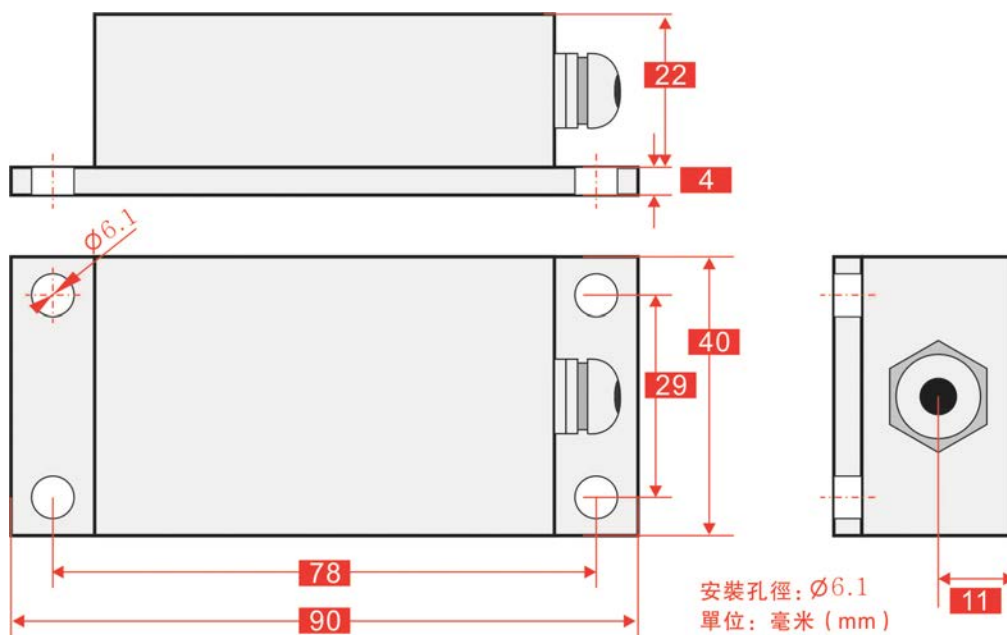

Size: L90×W40×H26mm

## Measuring Directions&Fix

The installation must guarantee the product bottom is parallel to measured face , and reduce the influence of dynamic and acceleration to the sensor. This product can be installed horizontally or mounted vertically (mounted vertically selection is only applicable to the single axis), for installation please refer to the following scheme :

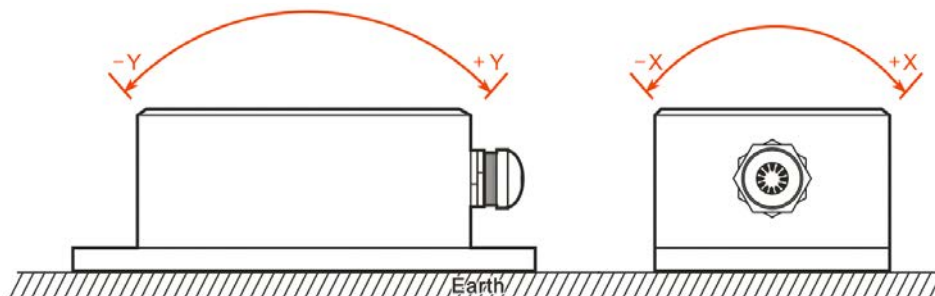

## Angle output calculation formula

$$\text{Angle} = (\text{output voltage} - \text{Zero position voltage}) \div \text{Angle sensitivity}$$

$$\text{Angle sensitivity} = \text{output voltage range} \div \text{Angle measuring range}$$


E.g: SCA120T-30-V1 ( $\pm 30^\circ$  Measuring range 0~5V output voltage range )

$$\text{Angle sensitivity} = 5 \div 60 = 0.83333 \text{ V}/^\circ$$

## Production installation notes :

Please follow the correct way to install tilt sensor, incorrect installation can cause measurement errors, with particular attention to the "surface", "line":

- 1) The Sensor mounting surface and the measured surface must be fixed closely, smoothly, stability, if mounting surface uneven likely to cause the sensor to measure the angle error. See Figure Pic.AB
- 2) The sensor axis and the measured axis must be parallel, the two axes do not produce the angle as much as possible. See Figure Pic.CD

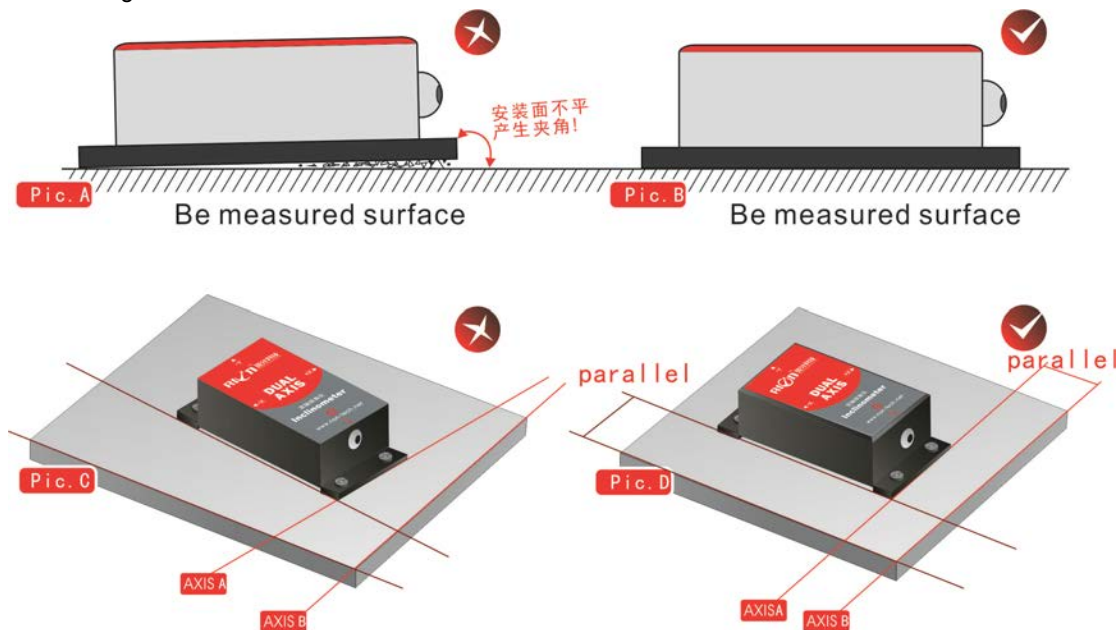

## Electrical Connection

Line color	BLACK	WHITE	GREEN	RED
function	GND Power Negative	Out X X-Axis output voltage	Out Y Y-Axis output voltage	Vcc Power Power positive



※ More information please visit Rion's company website: [www.rion-tech.net](http://www.rion-tech.net)



**深圳市瑞芬科技有限公司**

CHINA SHENZHEN RION TECHNOLOGY CO.,LTD.

✓ 倾角传感器    ✓ 倾角（调平）开关    ✓ 数显水平仪    ✓ 陀螺仪  
✓ 三维电子罗盘    ✓ 加速度计    ✓ 航姿参考系统    ✓ 寻北仪

T: 0755-29657137 / 29761269    F: 0755-29123494

W: [www.rion-tech.net](http://www.rion-tech.net)    E: [sales@rion-tech.net](mailto:sales@rion-tech.net)

A: 中国·深圳市宝安区82区华丰科技园 五期3F

*Attitude Solution Provider*  
姿态方案解决专家!