## Honeywell

## **Model 3132**

# Tension/Compression Pancake Load Cell



These general purpose designs have exceptional structural capability to withstand extraneous loads, such as torque, bending moments, and side loads.

Available in capacities of 500 lb to 5000 lb, they offer maximum performance and enhanced accuracy.

Minimum deflection and compactness make these generalpurpose load cells easy to install and use.

#### **FEATURES**

- 500 lb to 5000 lb range
- Low sensitivity to extraneous loads
- Low deflection
- Rugged welded construction
- Built-in temperature compensation

### **Model 3132**

#### PERFORMANCE SPECIFICATIONS

Characteristic	Measure		
Load range <sup>1</sup>	500, 1000, 2000, 3000, 5000 lb		
Non-linearity	±0.1 % of rated output		
Hysteresis	±0.1 % of rated output		
Repeatability	±0.05 % of rated output		
Output @ rated capacity	3 mV/V ±0.25 % (nominal)		
Operation	Tension/compression		
Resolution	Infinite		
Standard calibration	Tension (+) and compression (-)		

#### **ENVIRONMENTAL SPECIFICATIONS**

Characteristic	Measure		
Temperature, operating	-54 °C to 93 °C [-65 °F to 200 °F]		
Temperature, compensated	21 °C to 77 °C [70 °F to 170 °F]		
Temperature effect, zero	±0.002 % of rated output/°F		
Temperature effect, output	±0.002 % of reading/°F		

#### **ELECTRICAL SPECIFICATIONS**

Characteristic	Measure
Strain gage type	Foil
Excitation (maximum)	20 Vdc or Vac RMS
Insulation resistance	> 5000 mOhm @ 50 Vdc
Bridge resistance (tolerance)	350 ohm
Number of bridges	1 or 2
Zero balance	±1.0 %
Electrical termination	PT02E-10-6P mates with PT06W-10-6S


#### **MECHANICAL SPECIFICATIONS**

Characteristic	Measure		
Static overload capacity	150 % of nominal capacity		
Material	Carbon steel		
Natural frequency	See table		

#### **WIRING CODES**

Cable				
Red	(+) excitation			
Black	(-) excitation			
Green	(+) output			
White	(-) output			

#### **TYPICAL SYSTEM DIAGRAM**

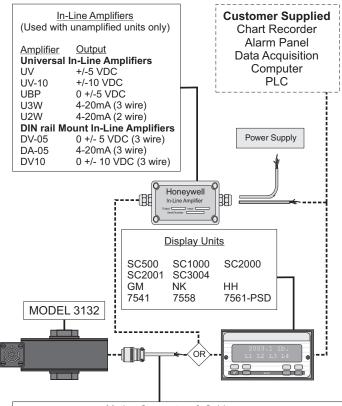

#### Mating Connectors & Cables

023-LW181-023-LF Mating Connector

7205-76-XX\* Mating connector & 6 conductor cable

(unamplified unit with sense leads but not shunt cal) 7205-75-XX\*\* Mating connector & 4 conductor cable

(unamplified unit without sense leads but not shunt cal)

7205-83-XX\* Mating connector & 6 conductor cable

(for connection to instrument 7541)

7205-82-XX\*\* Mating connector & 4 conductor cable

(for connection to instrument 7541)

\* XX represents length in feet 100ft maximum

\*\* XX represents length in feet 20ft maximum

## Tension/Compression Pancake Load Cell


#### **NATURAL FREQUENCY**

Nominal I capacity I			Static extraneous load limits				
lb	N	Static over- load capacity (% of nominal capacity)	Shear F <sub>x</sub> or F <sub>y</sub> (lb)	Bending M <sub>x</sub> or M <sub>y</sub> (lb-in)	Torque M <sub>z</sub> (lb-in)	Deflection at nominal load limit (in)	Ringing fre- quency (Hz)
500	2K	150	1400	2800	1100	0.005	1600
1K	5K	150	2000	3900	1100	0.005	2000
2K	10K	150	2800	5000	1100	0.005	3200
3K	15K	150	3400	5500	1100	0.005	4100
5K	20K	150	4200	5500	1100	0.005	5000

#### **MOUNTING DIMENSIONS**

Model	A cm [in]	B cm [in]	C cm [in]	D cm [in]	E cm [in]	F cm [in]
3132	6,65 [2.62]	1,60 [0.63]	8,89 [3.50]	2,54 [1.0]	3,02 [1.19]	4,45 [1.75]

G cm [in]	H cm [in]	J cm [in]	K cm [in]	L cm [in]
0,64 [0.25]	8,70 [0.34]	5,08 [2.0]	3,33 [1.31]	2,54 [1.0]

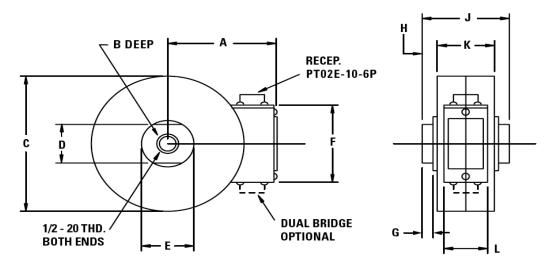

### **Model 3132**

#### **NOTES**

1. This unit calibrated to Imperial (non-Metric) units.


### Tension/Compression Pancake Load Cell

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847 Email inquiries to info.sc@honeywell.com



• DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.



- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847

Honeywell